



OUTSWING

SERIES 5140

STANDARD FEATURES

- Strong welded aluminum frame with integral weather baffle.
- Three extruded hinges, complete with stainless steel bushings, join the core to frame.
- Heavy, damage-resistant fiberglass panels are securely bonded to the core.
- Effective insulating foam core.
- High density foam lock block.
- Knob / knob lockset.
- Core is edge bored and capped for easy addition of deadbolt.
- Bulb vinyl on all four sides form the primary sealing system. Extruded flap vinyl on all four sides of the frame form the secondary seal.
- Manufactured to comply with HUD Std 3280-405.

OPTIONS AVAILABLE

- Deadbolt lock.
- Bright brass lockset and deadbolt.
- Painted frame.



Series 5140 OUTSWING Door


5140 OUTSWING Door

An outswing entrance door that combines beauty, durability and efficiency. It is completely prehung, ready to install. The 5140 also has a flat mounting flange.


OUTSWING DOOR *SERIES 5140*

AVAILABLE WINDOW STYLES

Contact your Kinro Sales Representative for the full line of window styles available.

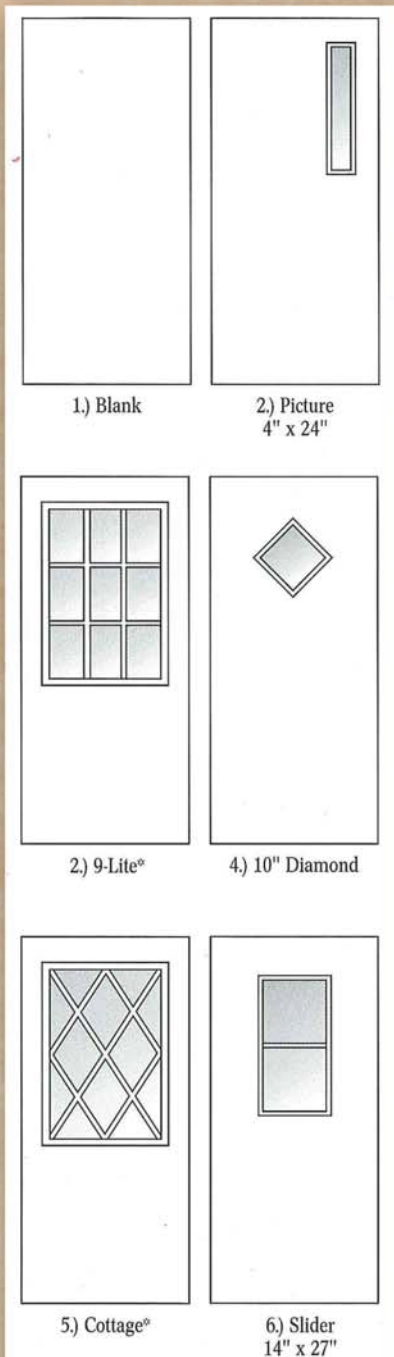

Kinro 5140 Series Cambered Door

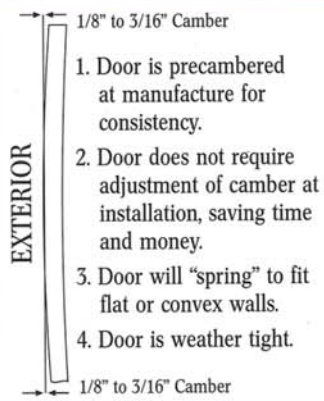

Standard Sizes

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

- ▲ 30" x 76" ▲ 30" x 78" ▲ 32" x 72"
- ▲ 32" x 76" ▲ 32" x 78" ▲ 34" x 76"

Division Headquarters:
2703 College Avenue
Goshen, IN 46528
Phone: (574)535-2085
Fax: (574)534-3475

WWW.KINRO.COM

It is the responsibility of the owner, architect or builder to make product selections that are in compliance with applicable laws and building codes.

Due to continuous product improvements, Kinro reserves the right to make changes, including, but no limited to, design, accessories, colors and prices without notice or obligation. Some details shown separately, or on products illustrated in this literature, may be optional at extra cost. Your Kinro Sales Representative is the best source of current product information.

Series 5140 OUTSWING Door